# THE FACTORY FLOOR TECHNICAL SPECIFICATIONS

Current as of June 2024

# CONTACTS

**The Factory Theatre**
105 Victoria Road, Marrickville

NSW Australia, 2205
+61 2 9660 9060 (Box Office)

**Century Venues**

105 Victoria Road, Marrickville
NSW Australia, 2205

+61 2 9519 9231

# INDICITIVE CHARGES: FACTORY FLOOR

The below indicative charges are EX GST and should be factored into event budgeting. These costs will be itemised on the venue settlement on completion of the show.

**Early / Late Access**

Contractual bump in time is from 6.00pm.
A venue hire charge of $50 + GST/hour + staff applies for hours outside of the contractual period.

**House Audio Component**

House Audio Component (as listed below in this document) is included in your contract

**House Lighting Component**
House Lighting Component (as listed below in this document) is included in your contract

**House Technicians**
The House Technicians will operate FOH Audio and Lighting control, Minimum 1 x house technician is required to operate this room.

**Additional Production Items**
Please contact Event Coordinator for prices and availability of production items outside of the standard as listed in this document.

*All technical advancing and prices for hires & staff for all shows to be coordinated through Event Manager / Production Manager.*

## STAGE DIMENSIONS

| | |
|---|---|
| Stage Width | 4.8m |
| Stage Depth | 4.8m |
| Height from stage to ceiling | 3.8m |
| Stage Surface | Timber floor, carpet covered. |

## AUDITORIUM DIMENSIONS

DSE to Audio & Lighting Mix Pos 10.8m
Theatre Floor Width 9.5m
3 x Tiered Platforms

## AUDITORIUM CONFIGURATIONS

| | |
|---|---|
| Concert | 250 capacity |
| Seated | 140 capacity |

## POWER

**3 Phase** power is not a standard in the Factory Floor. Please contact Event Coordinator for prices on 1 x 32amp wilco install

## STAGE FITTINGS

Black Stage curtains

Screen 3.0m x 2.0m

## LIGHTING

Control: Grand MA 3 on PC With Fader wing

**Additional Lighting Packages Available**

*Please contact your Event Coordinator for prices and availability.*

# RIGGING

All rigging and requirements installed and operated by in-house riggers only. The Production Manager must approve additional rigging requirements in advance.

# AUDIO

### FOH Speaker System

| | |
|---|---|
| EVX 3 Way (hi, mid, lo) | 2 |
| EV 2x18” Sub | 2 |
| DBX Drive rack | 1 |
| InterM P3200 Amplifier | 2 |

### FOH Control

| | |
|---|---|
| Midas M32 Digital Console | 1 |
| Midas Digital Stage Box DL32 | 1 |

### Monitor System (Mons control from FOH)


| | |
|---|---|
| 1502 Passive Wedges | 4 |
| C Audio Amp | 1 |
| Crown CE2000 | 1 |
| Behringer Ultradrive DCX 2496 | 1 |
| EV P1200 | 1 |


### System Info

| | |
|---|---|
| Shure Beta 52 | 1 |
| Shure Beta 91 | 1 |
| Shure SM57 | 6 |
| Shure SM58 | 4 |
| Sennheiser 604 | 3 |
| Rode M5 | 2 |

| | |
|---|---|
| Radial Passive Mono D.I. | 2 |
| Behringer Ultra-DI | 4 |
| Short Booms | 6 |
| Tall Booms | 7 |

| | |
|---|---|
| 8 Way Dropbox | 1 |

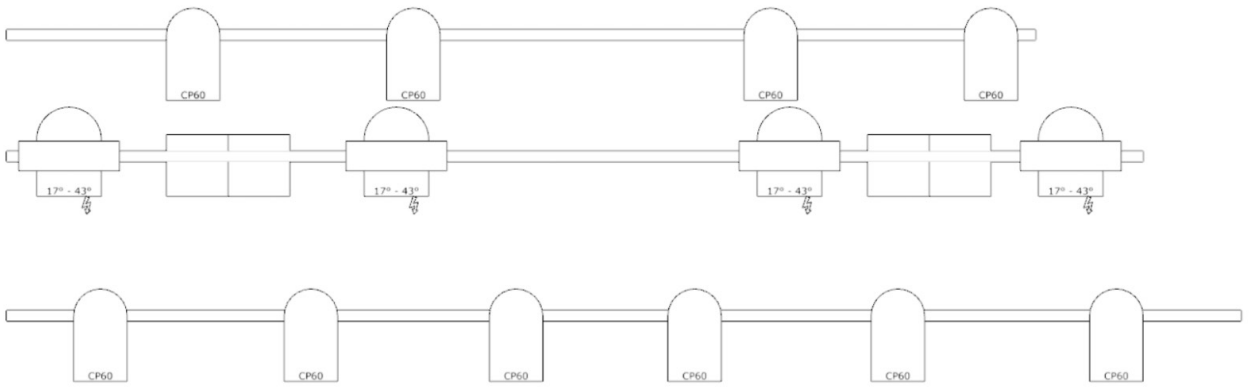

Acme Oxygen

Acme Ginamp

Fresno

Par 64

Factory Floor

| FID | Fixture | Mode | Patch |
|---|---|---|---|
| 1 | Dimmer | Mode 0 | 1.1 |
| 2 | Dimmer | Mode 0 | 1.2 |
| 3 | Dimmer | Mode 0 | 1.3 |
| 4 | Dimmer | Mode 0 | 1.4 |
| 5 | Dimmer | Mode 0 | 1.5 |
| 1 | Dimmer | Mode 0 | 1.1 |
| 6 | Dimmer | Mode 0 | 1.6 |
| 7 | Dimmer | Mode 0 | 1.7 |
| 8 | Dimmer | Mode 0 | 1.8 |
| 9 | Dimmer | Mode 0 | 1.9 |
| 10 | Dimmer | Mode 0 | 1.10 |
| 11 | Dimmer | Mode 0 | 1.11 |
| 12 | Dimmer | Mode 0 | 1.12 |
| | | | |
| 13 | Stage Par Colour 100 | 6ch | 1.13 |
| 14 | Stage Par Colour 100 | 6ch | 1.19 |
| | | | |
| 15 | Frezno 150 Hex | TR16 | 1.25 |
| 16 | Frezno 150 Hex | TR16 | 1.45 |
| | | | |
| 17 | 2-lite Blinder | 1ch | 1.65 |
| 18 | 2-lite Blinder | 1ch | 1.66 |
| | | | |
| 19 | ProPar 12x12 | 8ch | 1.67 |
| 20 | ProPar 12x12 | 8ch | 1.75 |
| 21 | ProPar 12x12 | 8ch | 1.83 |
| 22 | ProPar 12x12 | 8ch | 1.91 |
| 23 | ProPar 12x12 | 8ch | 1.99 |
| 24 | ProPar 12x12 | 8ch | 1.107 |
| 25 | ProPar 12x12 | 8ch | 1.115 |
| 26 | ProPar 12x12 | 8ch | 1.123 |
| 27 | ProPar 12x12 | 8ch | 1.131 |
| 28 | ProPar 12x12 | 8ch | 1.139 |
| | | | |
| 101 | Acme Oxygen | Mode 1 | 1.147 |
| 102 | Acme Oxygen | Mode 1 | 1.164 |
| 103 | Acme Oxygen | Mode 1 | 1.181 |
| 104 | Acme Oxygen | Mode 1 | 1.198 |
| | | | |
| 201 | Acme Ginamp | 18ch | 1.215 |
| 202 | Acme Ginamp | 18ch | 1.233 |