THE FACTORY THEATRE
TECHNICAL SPECIFICATIONS

Current as of July 2024

CONTACTS

The Factory Theatre
105 Victoria Road, Marrickville
Sydney Australia, 2205
+61 2 9660 9060 (Box Office)

Century Venues
105 Victoria Road, Marrickville
NSW Australia, 2205
+61 2 9519 9231

INDICITIVE CHARGES: FACTORY THEATRE

The below indicative charges are EX GST and should be factored into event budgeting. These costs will be itemised on the venue settlement on completion of the show.

Early / Late Access
An additional venue hire fee + staff charges applies for additional hours outside of the contractual period.

House Audio Component
House Audio Component (as listed below in this document) is included in contractual hire.

House Lighting Component
House Theatre Lighting Component (as listed below in this document) is included in contractual hire.

Additional Production Items
Please contact Event Manager / Production Manager for prices and availability of production items outside of the standard as listed in this document.

All technical advancing and prices for hires & staff for all shows to be coordinated through Event Manager / Production Manager.

STAGE DIMENSIONS

DSE to Rear of Stage	6m
Stage Width	8m
Stage Height	1.13m
Stage Rake	0 degrees
Stage Surface	Timber floor, painted black

AUDITORIUM DIMENSIONS

DSE to Audio & Lighting Mix Pos	16m
Theatre Floor Width	18.4m
Floor to house ceiling	4.5m

POWER

Lighting

2 x 32amp 3 phase outlets

Audio

2 x 32amp 3 phase outlets

STAGE FITTINGS

2.4m x 2.4m Megadeck drumriser @ 300mm
Black upstage curtain

Cinema Screen	3.5m x 4m motorised screen

Barricade

Note: barricade is not standard with hire of the venue. Please contact your Event Manager / Production Manager should you require a steel barricade in place.

RIGGING

All rigging and fly system requirements installed and operated by inhouse riggers only. The Production Manager must approve all additional rigging requirements in advance.

Lighting

Grand MA3 Controller on PC with Command Wing	1

AUDIO

FOH Speaker System

Flown NEXO GEO S 1210	12
Ground RS 15 Sub	4
Camco Vortex 6 Amps	4
Nexo NX242 Processors	3

FOH Control

Dlive S5000 with DM48 Stage Rack	1
Dedicated CAT runs to stage for touring consoles.	

Monitor Control

Dlive S3000 with DM48 Stage Rack	1

Monitor System

(5 SENDS PLUS DRUMFILL)

Wayloud Speakers	9
Crown Macrotech 2400	3
DBX1231	3
Generic Drumfill (Sub/Top)	1
Camco Tecton 38.4 (Drumfill)	1
EV EX24 Xover (Drumfill)	1

System Info

Multicore	40ch
Shure B52a	2
Shure B91a	2
Shure B58a	8
SE V7	2
Shure SM57	10
Sennheiser 904	4
Sennheiser e906	1
Sennheiser 604	1
Rode NT5	4
Behringer C2	1
Radial Passive Stereo DI	4
Radial DI Mono Passive	2

Short Booms	10
Heavy Tall Booms	12
Straight Stands	2

8 Way Dropbox	4
12 Way Dropbox	1

DRESSING ROOMS & PRODUCTION OFFICES

1x Dressing rooms available
1x Kitchenette
Toilet Facilities
Dressing Room 7.6m x 2.8m
Dressing room mirror lighting

Tea and coffee facilities available in common area

Internet Access

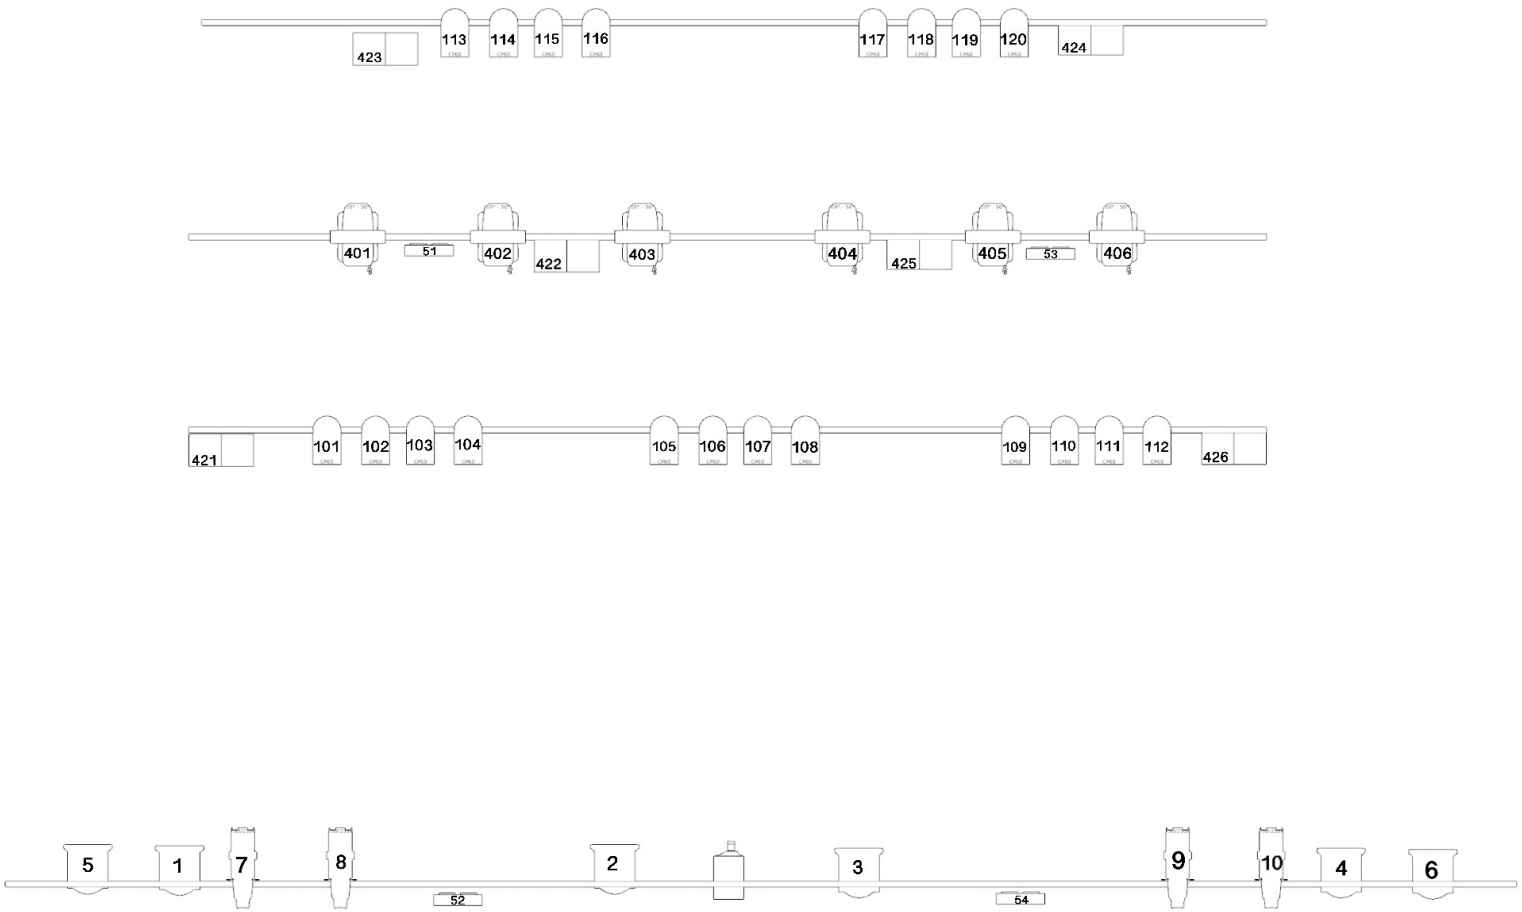
Wireless Network Name	CV-WIFI
Wireless Network Password	Available – Printed on sign in dressing rooms.

LOADING AREAS

Load in located through main gates of Factory Theatre courtyard.
Lift access available. Please liaise with BOH Manager upon arrival.
30 Stairs from Courtyard to stage loading.

FACTORY THEATRE HOUSE RULES

No Wheels on Auditorium Carpet.
All doors, stage or house must be clear at all times for access
All stage equipment must enter via Courtyard
No seats, armrests, or backrests can be used as a step
No one but house personnel are permitted in the roof or grid
Only house riggers may operate rigging equipment or rig
Do not adjust stage drapery
Do not use gaffa tape on stage drapery, proscenium wall or backstage walls
Trucks cannot park in front of the theatre earlier than 1 hour after conclusion of performance
Load out to be carried out safely and immediately after conclusion of performance
The venue must be cleared of all patrons and the loading passage way cleared of patrons and rubbish before cases can be loaded out.


423
113
114
115
116
117
118
119
120
424
401
51
402
422
403
404
425
405
53
406
421
101
102
103
104
105
106
107
108
109
110
111
112
426
5
1
7
8
52
2
3
54
9
10
4
6
Stage Par Colour IP
Energy Spot Pro 400
Acme Ginamp
Stage Blinder IP
Fresno
Ek Profile
Projector

Factory Patch

FID	Fixture	Mode	Patch
1	Frezno 150 TW	STD P	1.1
2	Frezno 150 TW	STD P	1.9
3	Frezno 150 TW	STD P	1.17
4	Frezno 150 TW	STD P	1.25
5	Frezno 150 HEX	TR16	1.33
6	Frezno 150 HEX	TR16	1.53
7	EK Profile	2ch	1.73
8	EK Profile	2ch	1.75
9	EK Profile	2ch	1.77
10	EK Profile	2ch	1.79
101	Acme Stage Par 100 Color	6ch	1.101
102	Acme Stage Par 100 Color	6ch	1.107
103	Acme Stage Par 100 Color	6ch	1.113
104	Acme Stage Par 100 Color	6ch	1.119
105	Acme Stage Par 100 Color	6ch	1.125
106	Acme Stage Par 100 Color	6ch	1.131
107	Acme Stage Par 100 Color	6ch	1.137
108	Acme Stage Par 100 Color	6ch	1.143
109	Acme Stage Par 100 Color	6ch	1.149
110	Acme Stage Par 100 Color	6ch	1.155
111	Acme Stage Par 100 Color	6ch	1.161
112	Acme Stage Par 100 Color	6ch	1.167
113	Acme Stage Par 100 Color	6ch	1.173
114	Acme Stage Par 100 Color	6ch	1.179
115	Acme Stage Par 100 Color	6ch	1.185
116	Acme Stage Par 100 Color	6ch	1.191
117	Acme Stage Par 100 Color	6ch	1.197
118	Acme Stage Par 100 Color	6ch	1.203
119	Acme Stage Par 100 Color	6ch	1.209
120	Acme Stage Par 100 Color	6ch	1.215
401	Acme XA400 Energy Spot Pro	Mode 3 - 25ch	1.251
402	Acme XA400 Energy Spot Pro	Mode 3 - 25ch	1.276
403	Acme XA400 Energy Spot Pro	Mode 3 - 25ch	1.301
404	Acme XA400 Energy Spot Pro	Mode 3 - 25ch	1.326
405	Acme XA400 Energy Spot Pro	Mode 3 - 25ch	1.351
406	Acme XA400 Energy Spot Pro	Mode 3 - 25ch	1.376
51	Stage Blinder IP	2ch	1.401
52	Stage Blinder IP	2ch	1.407

Factory Patch

53	Stage Blinder IP	2ch	1.413
54	Stage Blinder IP	2ch	1.419
201	Acme Stage Par 100 Color	6ch	1.225
202	Acme Stage Par 100 Color	6ch	1.231
203	Acme Stage Par 100 Color	6ch	1.237
204	Acme Stage Par 100 Color	6ch	1.243
421	Acme Ginamp	36ch	2.1
422	Acme Ginamp	36ch	2.37
423	Acme Ginamp	36ch	2.73
424	Acme Ginamp	36ch	2.109
425	Acme Ginamp	36ch	2.145
426	Acme Ginamp	36ch	2.181
601	Antari F-1 Fazer	2ch	1.511