METRO

THEATRE SYDNEY

THE METRO THEATRE
TECHNICAL SPECIFICATIONS

Current as of June 2024

CONTACTS

The Metro Theatre

624 George Street
Sydney Australia, 2000
+61 2 9660 9060 (Box Office)

Century Venues

105 Victoria Road
Marrickville NSW Australia, 2205

+61 2 9519 9231

INDICITIVE CHARGES: METRO THEATRE

The below indicative charges are EX GST and should be factored into event budgeting. These costs will be itemised on the venue settlement on completion of the show.

Early / Late Access

A venue hire charge of $120 + GST/hour + staff applies for additional hours outside of the contractual period.

House Audio Component

House Audio Component (as listed below this document) is included in the contractual hire of the venue.

House Lighting Component

House Theatre Lighting Component (as listed below in this document) is included in the contractual hire of the venue

Additional Production Items

Please contact Event Manager / Production Manager for prices and availability of production items outside of the standard as listed in this document.

All Technical advancing and prices for hires & staff for all shows to be coordinated through your Event Coordinator.

STAGE DIMENSIONS

Stage Width	10.1m
Stage Height from Floor	970mm
Stage to ceiling height	4.6m
DSE to rear wall	6m

Stage Rake	0deg rake. Flat Floor
Stage Surface	Timber floor, carpeted

AUDITORIUM DIMENSIONS

DSE to Audio & Lighting Mix Pos	12.8m
DSE to rear of room	24m
Theatre Floor Width	19.4m

POWER

Lighting

4 x 32amp 3 Phase outlets located Stage Right. 2 are in use for house lighting rig.

Audio

2 x 32amp 3 Phase outlets located on Stage Left.
1 x 32amp 3 Phase outlet located on Stage Right.

STAGE FITTINGS

2 x Black velour Legs Upstage Black Smother

HOUSE TRUSS

FOH Truss

1x tri truss located over dancefloor on 2x 500kg chain blocks 3.5m from DSE

Upstage Truss

1x tri-truss, 9.0m width on 2/3x 500kg chain blocks 6m from DSE.

LIGHTING

Please see LX plot on following page.

Dimmers	12ch, 1x Jands FP12
Control	Grand MA3 on PC with Command Wing
Data Splitter	Jands DD6-2

10 of ACME XA400 Energy Spot Pro
24 of ACME Stage Par 100 Colour
8 of Acme Ginamp
6 of Acme Stage Blinder
4 of ACME RGBW Stage Par Colour
5 of ETC Source4 Profile
2 of 1K Selecon Wash Lights

Additional Lighting Packages Available

Please contact your Event Manager / Production Manager for prices and availability

Acme Ozone
Atomic Strobes
Duet/4 Way Blinder
Hazer
1.2K Explorer Followspot
Dry Ice Machine
Upright Truss & Baseplates

Followspot Operators

FOH followspot operators are booked by Event /Production Manager on a minimum 4 hour call.

RIGGING

All rigging and fly system requirements installed and operated by inhouse riggers only. The Production Manager must approve all additional rigging requirements in advance.

AUDIO VISUAL

The Metro Theatre has a 4.5m x 2.5m LED Screen hung from the US Truss. The high resolution screen has a 3.9mm dot pitch. The screen comes with a HDMI input at SR or FOH. This is a permanent install.

For further details and pricing please contact the Production Manager.

FOH Mix to Rear Truss	18.8m
Room Truss to Rear Truss	9.5m

AUDIO

FOH Speaker System

L'Acoustics V-Dosc Full Range	8
L'Acoustics SB218	8
Nexo Alpha M3 Down Fill & In Fill	4
Nexo Alpha B1 In Fill	2

Crown Amps & Dolby Lake Processing

FOH Control

Allen & Heath Dlive S5000 with 64/32 IO
Waves and Dante Cards

Monitor Control

Allen & Heath Dlive S3000 with 64/32 IO

Monitor System

Wayloud Monitors	9
EVX	2
18" Subs	3 (2x sidefill, 1x drum fill)

6 of Monitor Mixes plus Drum, Cue Mix
2 of Side fill mixes

System Info

Multicore	60 channel with 2 way split

In House Audio Equipment

Shure Beta 52	1
Shure Beta 91	1
Sennheiser 904	5
Shure SM81	5
Rode NT5	2
Beyer Dynamic M88	1
Sennheiser 906	2
Shure Beta 58	4
Shure Sm58	6
Shure Sm57	9
Shure Beta 56	2
Radial PC DI	2
Radial Mono Active DI	4
Radial Stereo Active DI	4
Radial Mono Passive DI	1
Radial Stereo Passive DI	1

Short Stands	15

Tall Stands 14

DRESSING ROOMS & PRODUCTION OFFICES

1 x Dressing Room downstairs, Stage Right
1 x Dressing Room upstairs, Stage Right
1 x Production Office downstairs, Stage Right

All rooms equipped with wall mirrors and mirror lighting.
Toilets and showers available in both dressing rooms.
Tea and coffee facilities available.

Internet Access

Wireless Network Name	Airport Extreme
Wireless Network Password	METRO.624


LOADING AREAS

Loading Dock located via Central Lane.

Loading Door Height	2000mm
Loading Door Width	1480mm
Distance from dock to stage	7m from door to stairs
	29 Stairs up to landing
Loading Dock	3.6m Clearance / 5.5m wide x 10m deep

METRO THEATRE HOUSE RULES

All doors, stage or house must be clear at all times for access.
All stage equipment must enter via Loading Dock.
Only house riggers may operate rigging equipment or rig.
Do not adjust stage drapery.
Load out to be carried out safely and immediately after conclusion of performance.

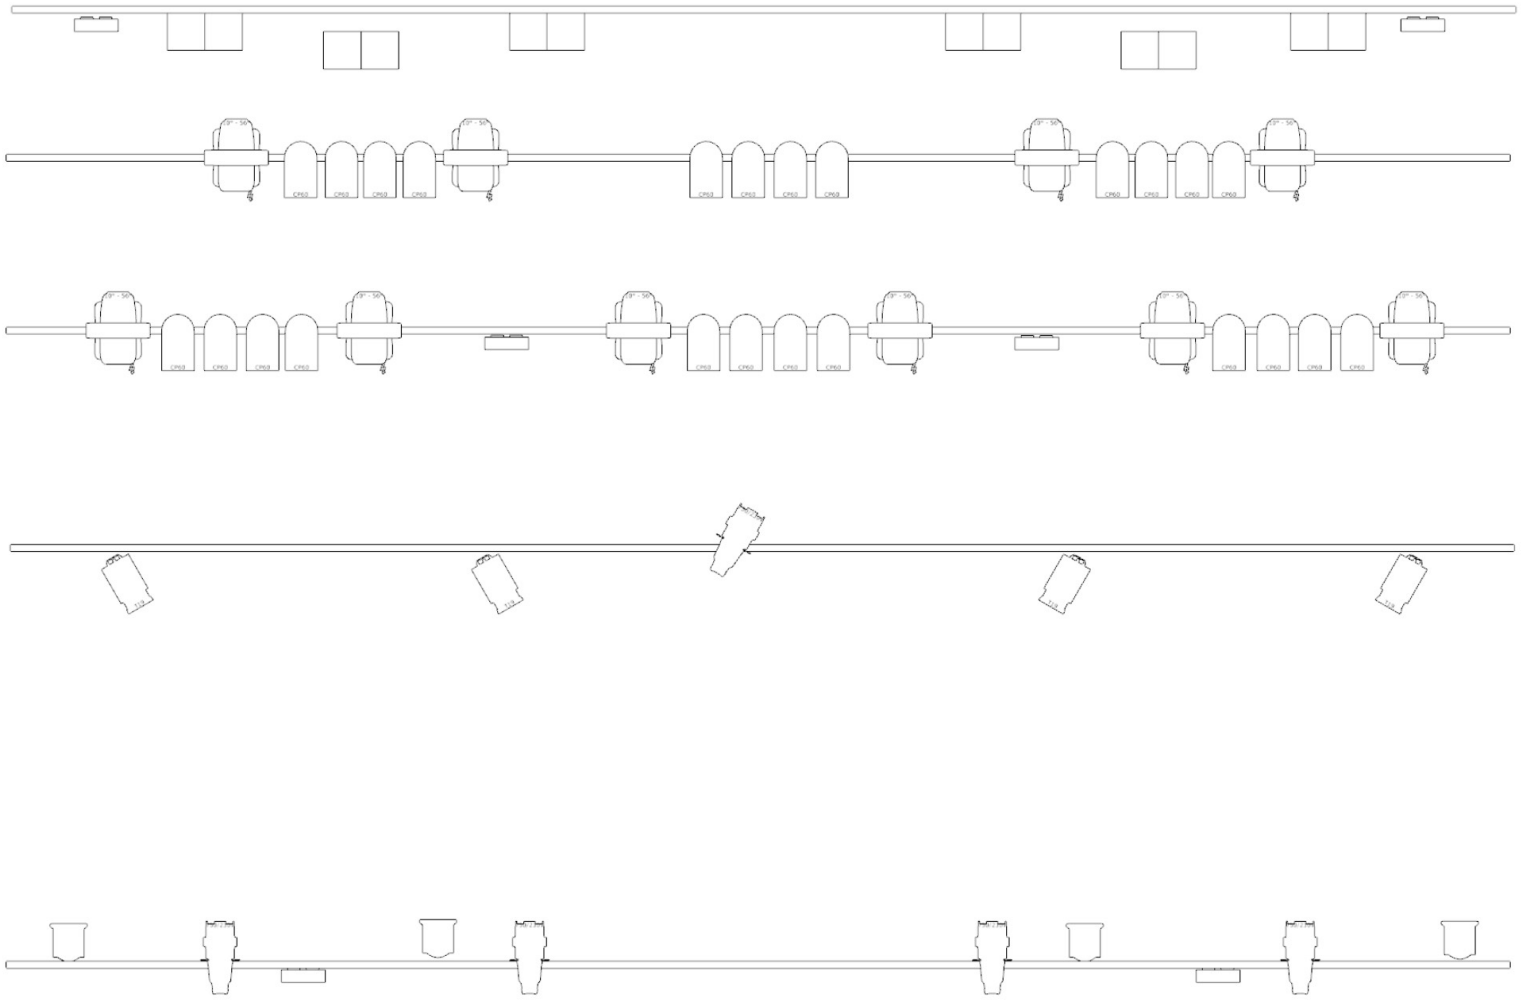

Stage Par Colour IP

Acme Ginamp


Energy Spot Pro 400

Stage Blinder IP

Stage Par Colour

Fresnel

Source Four

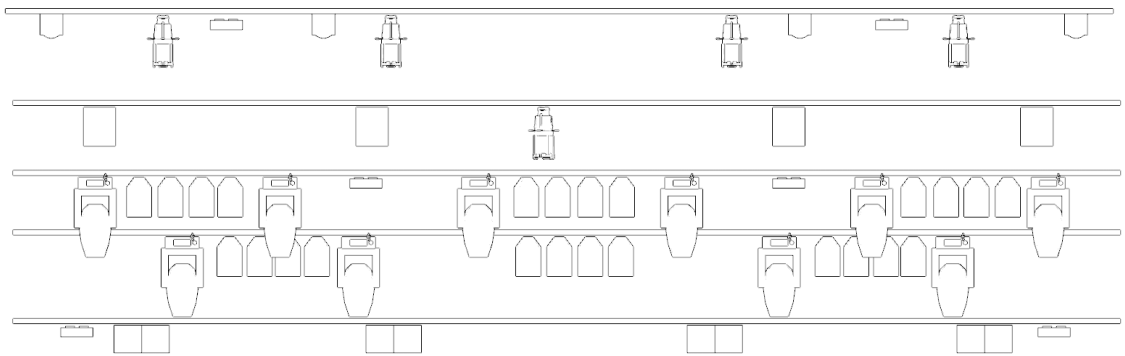

Metro Patch

FID	Fixture	Mode	Patch
1	1.2k Fresnel	1ch	1.1
2	ETC Source4 Profile	1ch	1.2
3	ETC Source4 Profile	1ch	1.3
4	ETC Source4 Profile	1ch	1.4
5	ETC Source4 Profile	1ch	1.5
1	1.2k Fresnel	1ch	1.1
6	ETC Source4 Profile	1ch	1.6
201	Acme Stage Par Color	6ch	1.25
202	Acme Stage Par Color	6ch	1.31
203	Acme Stage Par Color	6ch	1.37
204	Acme Stage Par Color	6ch	1.43
301	Acme Stage Par 100 Color	6ch	1.51
302	Acme Stage Par 100 Color	6ch	1.57
303	Acme Stage Par 100 Color	6ch	1.63
304	Acme Stage Par 100 Color	6ch	1.69
305	Acme Stage Par 100 Color	6ch	1.75
306	Acme Stage Par 100 Color	6ch	1.81
307	Acme Stage Par 100 Color	6ch	1.87
308	Acme Stage Par 100 Color	6ch	1.93
309	Acme Stage Par 100 Color	6ch	1.99
310	Acme Stage Par 100 Color	6ch	1.105
311	Acme Stage Par 100 Color	6ch	1.111
312	Acme Stage Par 100 Color	6ch	1.117
313	Acme Stage Par 100 Color	6ch	1.123
314	Acme Stage Par 100 Color	6ch	1.129
315	Acme Stage Par 100 Color	6ch	1.135
316	Acme Stage Par 100 Color	6ch	1.141
317	Acme Stage Par 100 Color	6ch	1.147
318	Acme Stage Par 100 Color	6ch	1.153
319	Acme Stage Par 100 Color	6ch	1.159
320	Acme Stage Par 100 Color	6ch	1.165
321	Acme Stage Par 100 Color	6ch	1.171
322	Acme Stage Par 100 Color	6ch	1.177
323	Acme Stage Par 100 Color	6ch	1.183
324	Acme Stage Par 100 Color	6ch	1.189
401	Acme XA400 Energy Spot Pro	Mode 3 - 25ch	1.201
402	Acme XA400 Energy Spot Pro	Mode 3 - 25ch	1.226
403	Acme XA400 Energy Spot Pro	Mode 3 - 25ch	1.251
404	Acme XA400 Energy Spot Pro	Mode 3 - 25ch	1.276

Metro Patch

405	Acme XA400 Energy Spot Pro	Mode 3 - 25ch	1.301
406	Acme XA400 Energy Spot Pro	Mode 3 - 25ch	1.326
407	Acme XA400 Energy Spot Pro	Mode 3 - 25ch	1.351
408	Acme XA400 Energy Spot Pro	Mode 3 - 25ch	1.376
409	Acme XA400 Energy Spot Pro	Mode 3 - 25ch	1.401
410	Acme XA400 Energy Spot Pro	Mode 3 - 25ch	1.426
501	Acme Stage Blinder IP	6ch	1.451
502	Acme Stage Blinder IP	6ch	1.457
503	Acme Stage Blinder IP	6ch	1.463
504	Acme Stage Blinder IP	6ch	1.469
505	Acme Stage Blinder IP	6ch	1.475
506	Acme Stage Blinder IP	6ch	1.481
601	Antari F-1 Fazer	2ch	1.511
801	Acme Ginamp	126ch	2.1
802	Acme Ginamp	126ch	2.127
803	Acme Ginamp	126ch	2.253
804	Acme Ginamp	126ch	2.379
805	Acme Ginamp	126ch	3.1
806	Acme Ginamp	126ch	3.127
807	Acme Ginamp	126ch	3.253
808	Acme Ginamp	126ch	3.379